

TBOX-2310

Industrial Intel Celeron J1900 fan-less Box PC

Specification

V2.0

Brief Introduction

TAICENN TBOX-2310 is a high-performance fan-less industrial Box PC model, it adapts Intel Celeron J1900/J1800 CPUs, having advanced computer performance and low power consumption. TBOX-2310 storage can support 1*mSATA and 1* 2.5 inch SATA SSD or HDD; The design has a variety of communication interface, with 2* LAN ports, 5* USB 2.0 ports, 1* USB 3.0 port, 6* RS232 (Optional with 1* RS485); The power input is DC 9~24V voltage, and has over-current, over-voltage and reverse-polarity protection.

TAICENN TBOX-2310 uses full-sealed box construction, and it can prevent dust from entering the device system. Large aluminum fin heat sink can distribute the heat effectively and quickly, ensures the longer reliability and life-span of the system. TAICENN TBOX-2310 operating temp. is -20°C~+70°C, can be suitable for longer-time operating and harsh environment industrial application projects, such as intelligent transportation system, machine vision, medical device, textile machinery, rail transportation and industry automation. TAICENN TBOX-2310 can be compatible with Windows 7, Windows 7 Embedded, Windows8, Windows10, Linux Operating system and embedded Operating system, and it is also compatible with application software based on those operating systems.

Product Image




Specification parameter

Product model	TBOX-2310
System & Hardware	
BIOS	SPI AMI EFI BIOS
CPU	Intel Celeron J1900
CPU GHz	Quad-core Four threads, 2.0Ghz
Memory	SO-DIMM, DDR3L, Max. up to 8GB
Storage	1* 2.5" SATA + 1* mSATA
GPU	Intel HD Graphics Gen7
Network	2* Intel I211AT (Optional Wifi/3G/4G)
Audio	Realtek ACL 282 Audio controller
Expansion	1x full-size mPCIe slot
Watch dog	0~255 seconds programmable
System	Windows 7, Windows 7 Embedded, Windows8, Windows10, Linux
I/O	
COM	6*RS232, DB9, 50~115.2kbps COM2 supports RS232/RS485 COM3 supports RS232/TTL
Network	2*RJ45, 10/100/1000 Mbps
Audio	Line-In, Line-Out
USB	6*USB (1*USB3.0 + 5*USB2.0)
Display	1*VGA, 1*HDMI
Power Input	1*2 pins, phoenix port
GPIO	8*GPIO (Optional)
Structure	
Box Structure and surface	Aluminum alloy, anodizing and anti-scratch treatment
Cooling System	Finned aluminum heatsinks
Color	Silver + Black
Indicator	Power Switch/ Power LED/ HDD LED
Mounting	Support Desktop, Wall-mounted,
Dimension	236.5 x 150 x 60 (mm)
Net weight	About 1.5KG
Power & Environmental	
Voltage Input	DC 9~24V (Over-current, Over-voltage and reverse polarity protection)
Power Consumption	20W
EMC	CE/FCC Class A

Working temperature	-20°C~+70 °C
Wide temp. (Optional)	-40°C ~ +70°C
Storage temperature	-40°C~+80 °C
Relative humidity	10~95%@10°C (No condensation)
Vibration	50~500Hz,1.5G,0.15mm peak to peak
Shock	10G/peak (11ms sec)

Interface and Dimension

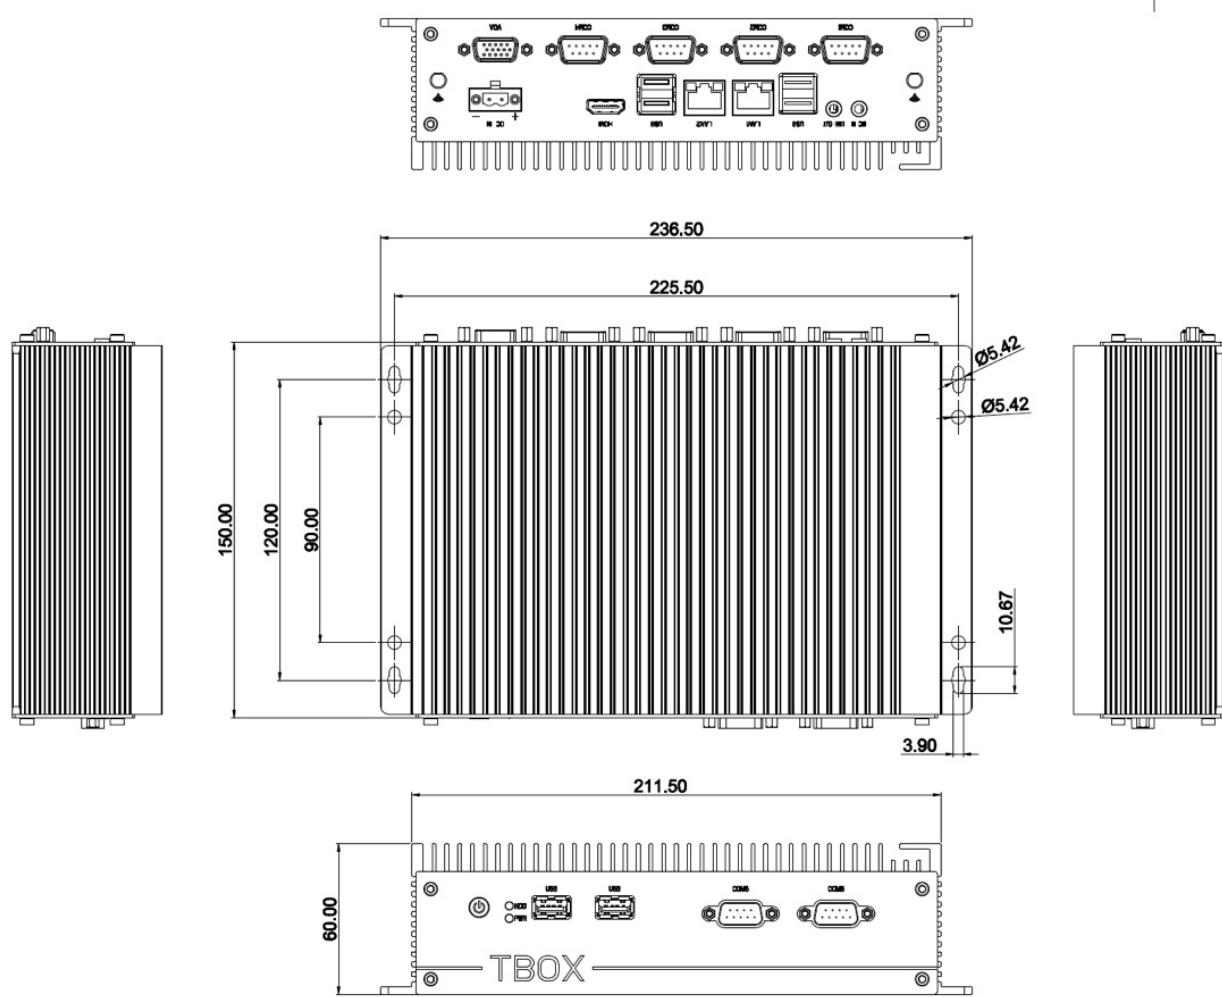

Ordering Information

TBOX-2310	Intel Celeron J1900/1*HDMI/1*VGA/2*RJ45/6*USB/6*RS232/DC 9~24V/Line In/Line-Out
TBOX-2320	Intel Celeron J1800/1*HDMI/1*VGA/2*RJ45/6*USB/6*RS232/DC 9~24V/Line In/Line-Out
Memory	DDR3L 2G/4G/8G
Storage	SSD: 16GB/32GB/64GB/128GB/256GB/512GB/1TB HDD: 500GB/1TB
Wireless module	Wifi: 802.11b/g/n Mini PCIe 150M 3G/4G: All network 4G module

TAICENN Technology

TAICENN, is a leading global **solution provider** of Embedded Box IPC, Touch panel IPC and industrial monitor, which are designed specifically for systems and applications that require excellent performance, high-level reliability and stability, long supply period and supports.

The information in this specification is subject to change without notice
All parts of TAICENN Technology documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from TAICENN Technology.