

TBOX-26308C

Industrial Intel Skylake Core I7 fan-less Embedded Box PC

Specification

V2.0

Brief Introduction

TAICENN TBOX-26308C is a high-performance fan-less industrial Box PC model, it adapts Intel Skylake Core I7-6500U CPUs, having advanced computer performance and low power consumption. TBOX-26308C storage can support 1 *mSATA and 1* 2.5 inch SATA SSD or HDD; The design has a variety of communication interface, with 2* LAN ports, 2* USB 2.0 ports, 4* USB 3.0 port, 8* RS232 (Optional with 2* RS485/RS422); The power input is DC 9~24V voltage, and has over-current, over-voltage and reverse-polarity protection.


TAICENN TBOX-26308C uses full-sealed box construction, and it can prevent dust from entering the device system. Large aluminum fin heat sink can distribute the heat effectively and quickly, ensures the longer reliability and life-span of the system. TAICENN TBOX-26308C operating temp. is -20°C~+70°C, can be suitable for longer-time operating and harsh environment industrial application projects, such as intelligent transportation system, machine vision, medical device, textile machinery, rail transportation and industry automation. TAICENN TBOX-26308C can be compatible with Windows 7, Windows 7 Embedded, Windows8, Windows10, Linux Operating system and embedded Operating system, and it is also compatible with application software based on those operating systems.

Product Image



Specification parameter

Product model	TBOX-26308C
System & Hardware	
BIOS	SPI AMI EFI BIOS
CPU	Intel Core I7-6500U
CPU GHz	Dual-core 2.5Ghz
Memory	SO-DIMM, DDR4L, Max. up to 16GB
Storage	1* 2.5" SATA + 1* mSATA
GPU	Intel HD Graphics Gen7
Network	2* Intel I211AT (Optional Wifi/3G/4G)
Audio	Realtek ACL 269 Audio controller
Expansion	None
Watch dog	0~255 seconds programmable
System	Windows 7, Windows 7 Embedded, Windows8, Windows10, Linux
I/O	
COM	8*RS232 (Optional with 2*RS485/RS422)
Network	2*RJ45, 10/100/1000 Mbps
Audio	Line-In, Line-Out
USB	6*USB (4*USB3.0 + 2*USB2.0)
Display	1*VGA, 1*HDMI
Power Input	1*2 pins, phoenix port
GPIO	8*GPIO (Optional)
Structure	
Box Structure and surface	Aluminum alloy, anodizing and anti-scratch treatment
Cooling System	Finned aluminum heatsinks
Color	Silver + Black
Indicator	Power Switch/ Power LED/ HDD LED
Mounting	Support Desktop, Wall-mounted,
Dimension	236.5 x 150 x 60 (mm)
Net weight	About 1.5KG
Power & Environmental	
Voltage Input	DC 9~24V (Over-current, Over-voltage and reverse polarity protection)
Power Consumption	25W
EMC	CE/FCC Class A
Working temperature	-20℃~+70℃

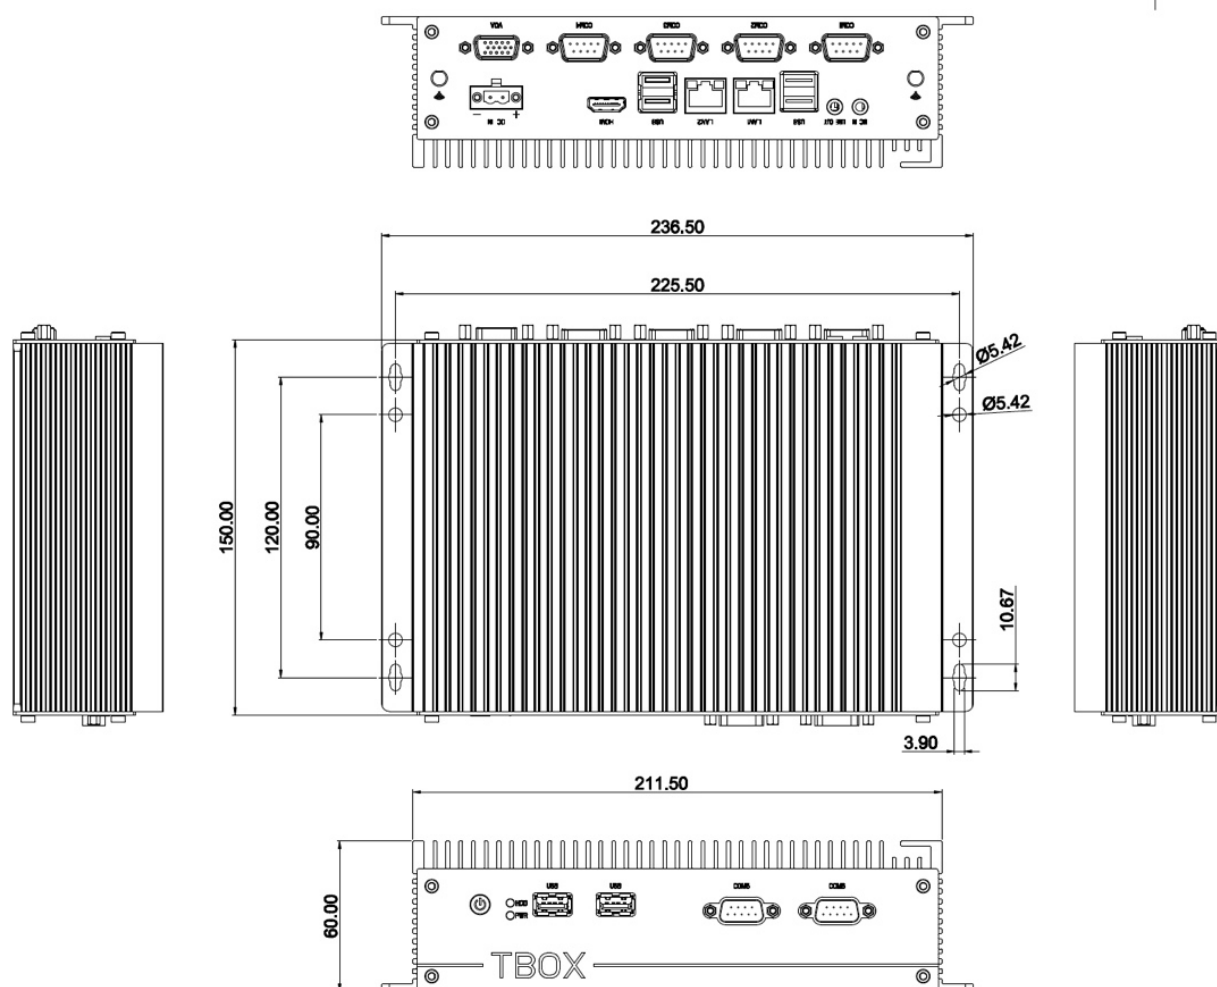

Ordering Information

TBOX-26108C	Intel Core I3-6100U/1*HDMI/1*VGA/2*RJ45/6*USB/8*COM/DC 9~24V/Line In/Line-Out
TBOX-261010C	Intel Core I3-6100U/1*HDMI/1*VGA/2*RJ45/6*USB/10*COM/DC 9~24V/Line In/Line-Out
TBOX-26208C	Intel Core I5-6200U/1*HDMI/1*VGA/2*RJ45/6*USB/8*COM/DC 9~24V/Line In/Line-Out
TBOX-262010C	Intel Core I5-6200U/1*HDMI/1*VGA/2*RJ45/6*USB/10*COM/DC 9~24V/Line In/Line-Out
TBOX-26308C	Intel Core I7-6500U/1*HDMI/1*VGA/2*RJ45/6*USB/8*COM/DC 9~24V/Line In/Line-Out
TBOX-263010C	Intel Core I7-6500U/1*HDMI/1*VGA/2*RJ45/6*USB/10*COM/DC 9~24V/Line In/Line-Out
Memory	DDR3L 4G/8G/16G
Storage	SSD: 16GB/32GB/64GB/128GB/256GB/512GB/1TB HDD: 500GB/1TB
Wireless module	Wifi: 802.11b/g/n Mini PCIe 150M 3G/4G: All network 4G module

TAICENN Technology

*TAICENN, is a leading global **solution provider** of Embedded Box IPC, Touch panel IPC and industrial monitor, which are designed specifically for systems and applications that require excellent performance, high-level reliability and stability, long supply period and supports.*

The information in this specification is subject to change without notice

All parts of TAICENN Technology documentation are protected by copyright law and all rights are reserved. This documentation may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior consent, in writing, from TAICENN Technology.